



Cutting Edge Technology The New GWF Variable Rotary Cutter w/ Tape over Tape Delivery Table

Features:

- Precision Cut Accuracy
- Computer Operated
- Tele-maintenance Intelligent System
- Integrated DMR Auto- Registration System
- $\pm 3/4$ " (19mm) manual sidelay whole machine
- Auto-Recovery Knock down Kicker Wheel
- Preset Configuration For 2,3,4 & 5 Up Products
- User Friendly
- Faster Make-Ready
- Low Maintenance
- High Performance Electrical Drive
- Minimal Jam-ups
- Low Operational cost
- High Speed Delivery Table

Specifications:

- Designed for maximum web width up to 38" (965mm)
- Designed to cut & deliver 2, 3, 4 & 5 around products of press repeat
- Delivers full bleed trimmed or non-bleed trimmed products.
- Produces straight cut and contour cut products
- Minimum product length possible = 3" (76mm)
- Minimum chip size = .25" (6mm)
- Cut-to-Cut accuracy within .003" (.08m)
- Multiple ribbons thickness cutting capability = .0625" (1.7mm)
- Paper Weight, minimum = 35# (51gsm) up to 10pt. (300gsm)
- Maximum speed = 1,600 ft/min. (500 m/min.)



contact GWF ►►



The Variable Rotary Cutter Uses Cost Efficient Disposable Straight Knife




Straight Cut Products




The Rotary Cutter Can Also Be Used To Produce Wide Variety Of Straight & Contour Cut Products With Full Bleed Trimming



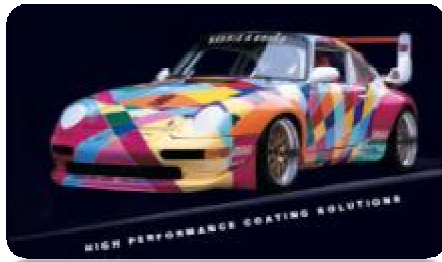

Magazine Covers

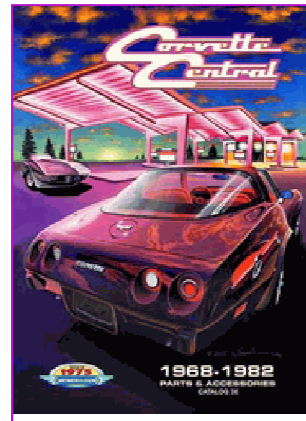

Catalogue Covers





Coupons



Promotional



Catalogues

Direct Mail



inserts







Variable Rotary Cutter/
with Delivery Table

◀ MAIN



**3493 East 83rd Ave.
Merrillville, IN 46410 USA
Tel: +1-219-942-7000, Fax: +1-219-942-7001**

www.gwf.cc